

MADE TO LAST







A sturdy construction made with the best components and shaped in a striking design

Every detail is meant to improve ergonomics, simplicity and comfort during use. The outline protects the machine and keeps reliability high over time. At its core, innovation and technology

provide the best performance and power, ensuring high cleaning quality and efficiency. A new instrument panel makes you feel all the technology inside, totally changing the user experience.









REDUCE THE TOTAL COST OF OWNERSHIP

The outer body surrounds the machine internal structure and mechanical parts, protecting them from accidental impact

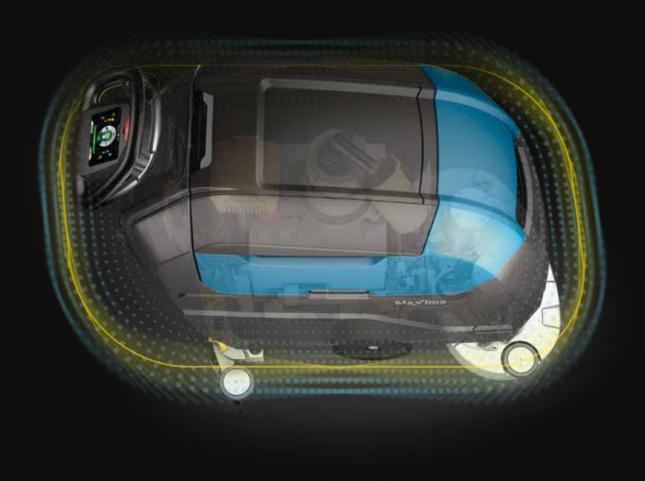

Polyethylene makes the machine sturdy and shockproof

The sturdy design reduces breakdowns, extends the machine lifetime and helps you save time and money

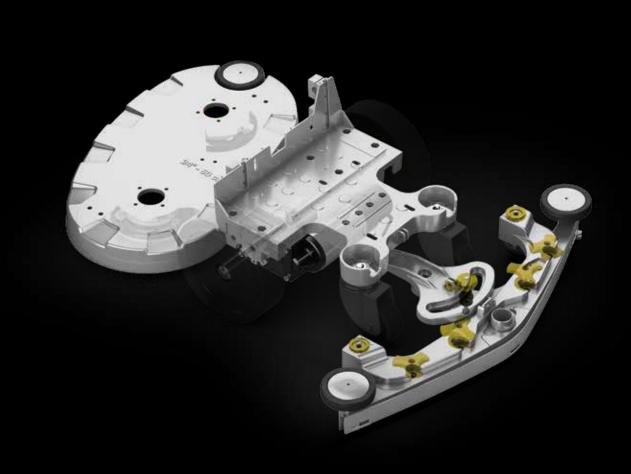

Aluminum increases machine reliability



SAVE TIME AND REDUCE COST TO CLEAN





ACCESSORY STORAGE COMPARTMENT

The operator can work in absolute tranquility in the knowledge that when he needs them, all the accessories are close at hand, and once finished with, these can easily be placed back in their compartment, allowing the cleaning operation to proceed without long interruptions and wasted time.





QUIET OPERATION IN OPENING HOURS
The Eco Mode and FNC technologies lower the noise level, safeguarding the health of the operator and of the people nearby





EASY MAINTENANCE - COLOR CODED PARTS

Parts which must be cleaned regularly at the end of every shift are colour coded in yellow for easy identification, saving time and making sure that your scrubbing machine is kept in perfect condition at all times




FFF - FIMAP FAST FILL

Automatic system for filling the fresh water tank, lets the operator perform other activities while the tank quickly fills up

Comfort and ease of use speed up cleaning operations



EASY MAINTENANCE
Spray gun for quick and easy cleaning of the recovery tank

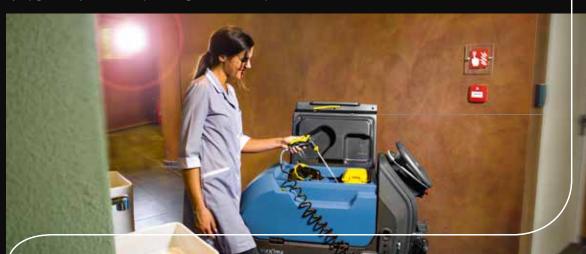



IMPROVE YOUR FACILITY IMAGE



POWER MODE

Perfect cleaning is guaranteed in one pass

When more scrubbing power is needed, activating Power Mode increases the delivery rate of detergent solution and boosts brush pressure and vacuum power for the time necessary to tackle heavy duty cleaning



Further solutions to increase productivity



Consistent cleaning results Pressure on the brushes is kept constant, delivering consistent high cleaning results on any type of flooring



No risk of slipping The powerful 3-stage vacuum motor leaves the floor immediately dry and safe



Reduce downtimes
The largest tanks in its class:
less stops to fill/empty the tanks



FLR-FIMAP LONG RANGE Increases productivity by up to 70%


Great autonomy
Work for up to 4 hours non-stop





VACUUM WAND

Vacuum wand allows to clean areas that are out of reach of the machine and successfully fulfill the task

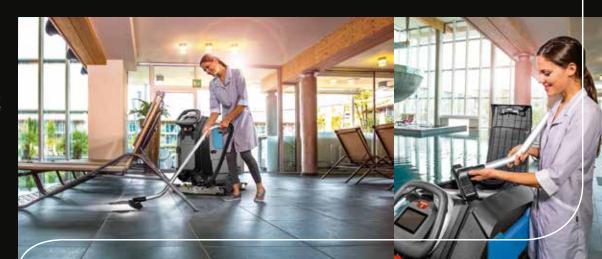



SAFETY SYSTEMS FOR ACCIDENT-FREE CLEANING

ACTIVE TECHNOLOGIES to prevent accidents



Enhances visibility in dim light

TOUCH SCREEN
DISPLAY



Control device letting the operator set the required speed

CRUISE CONTROL



Is automatically operated when the machine stops.
It works as a safety parking brake

ELECTROBRAKE



For a fast operator training and reduced cost to clean

VIDEO TUTORIALS



Maximize work safety in all conditions

LED HEADLIGHTS



They protect the operator, the people nearby and the environment





PASSIVE SYSTEMS to help the operator in case of emergency



Reduces time to service in case of emergency. The red button sends an sms alert to receive a prompt help, reducing downtimes

SOS DEVICE




By pressing a single button the machine stops immediately

EMERGENCY STOP



The operator is the centre of a high-tech universe, where everything is easy, intuitive and dynamic

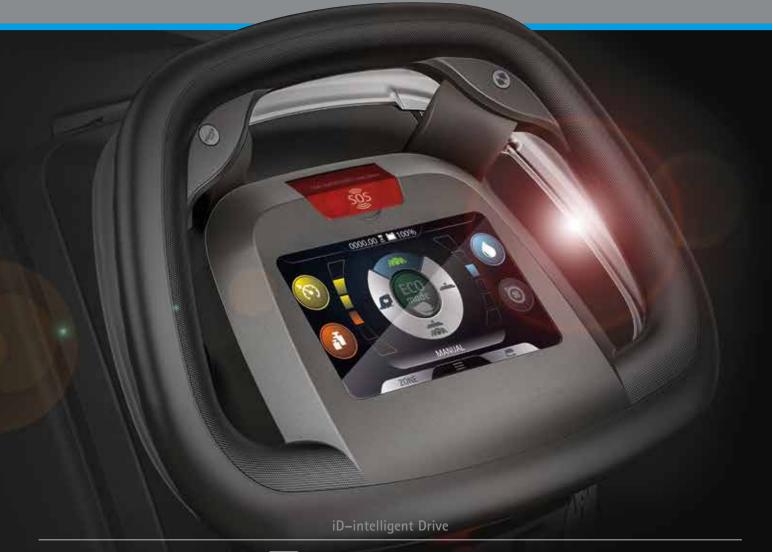



















All functions and activities are managed from a single interface, where a mere touch of the finger offers access to an extraordinary choice of customisable features to satisfy all types of requirements with extreme simplicity.

The high definition colour display offers the same intuitive experience as a smartphone





LOG-IN WITH PASSWORD To protect your investment




ZONE PROGRAMS
For all the performance you'll ever need



ECO MODETo protect the environment



POWER MODE
For maximum power when you need it



VIDEO TUTORIALS
For a more efficient, fast and easy operator training



EXPERIENCE CONNECTIVITY

Discover the FFM universe and experience the advantages of being constantly connected, with My.Machine app!



Keep tabs on your machines remotely when you want and from wherever you want!

Developing new technology to improve efficiency is one of the core missions of Fimap.

An example of this is FFM, the Fimap Fleet Management system which collects the data sent by the machines and transforms it into valuable information accessible to you easily in real time, 24/7, from your smartphone, through the app My.Machine.

Being constantly connected to your machines will help you operate them even more efficiently and effectively.

My.Machine lets you know where the machines are, if the

operation is being carried out according to plans and at the scheduled time.

The machines health status is constantly monitored. In the very unlikely event of a breakdown, you'll receive an alert notification directly on your smartphone, allowing you to take action promptly and immediately call the technical support.

You can check the battery conditions and the quality of the charges in order to optimize battery endurance and life cycle.











GEOLOCALISATION

USAGE INFORMATION

HEALTH STATUS

ENVIRONMENTAL IMPACT

You know where your machines are

You know how your machines are used

You know the health status of machines and batteries

You can check the machine consumption per intervention



SAVE RESOURCES

Advanced technological solutions offer a reduction in cost per sq.m. cleaned, more working autonomy, time savings and better cleaning results, letting you cover more surface area with the same resources.



The Eco Mode function helps prevent water, detergent and energy consumption by using only the quantities you need and nothing more




When the machine is idle, the brush motor, the vacuum motor*, the traction and the water flow will turn off automatically, reducing costs and emissions.

All the functions are reactivated automatically when the operator presence control is operated.

*Suction is not turned off automatically in E versions. In basic and Pro versions suction turns off when the squeegee is lifted up



Sustainable solutions to protect the environment

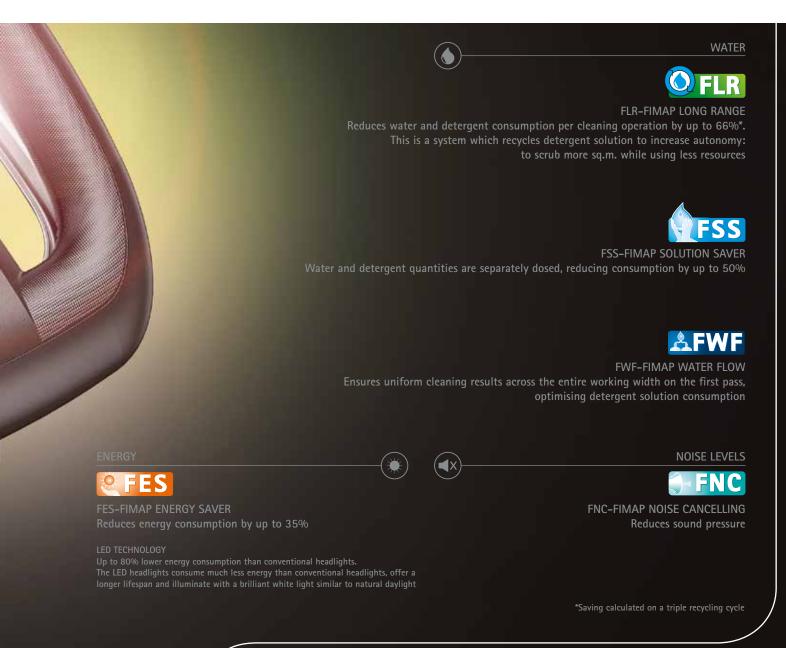



THE BEST FLEXIBILITY EVER

Choose your machine





with 1 disc brush or 1 pad holder



with 2 disc brushes







CYLINDRICAL




with 2 cylindrical brushes and a debris hopper for small sized solid debris



with pad



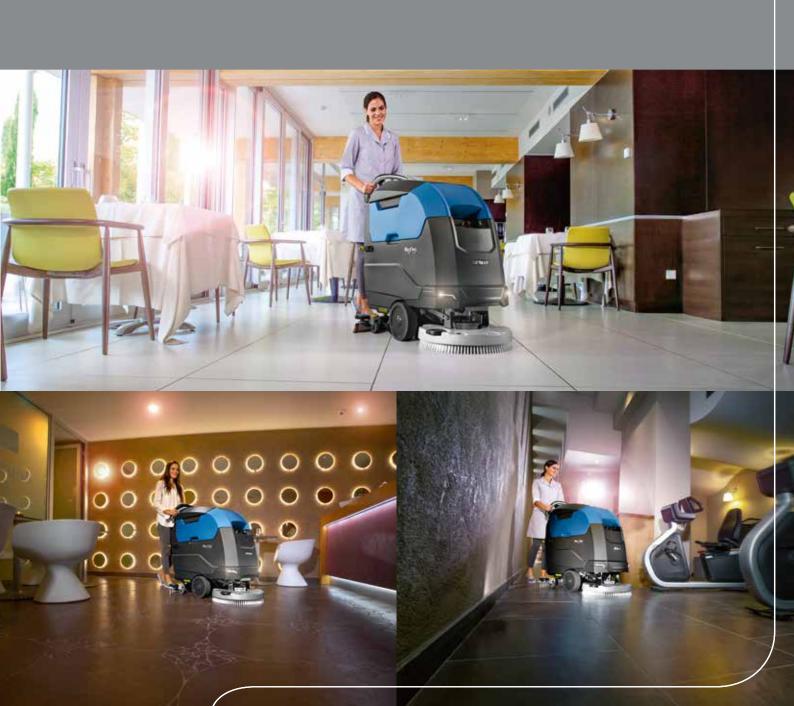



Build your own machine: create the perfect combination of tools that suits your requirements

Choose the instrument panel







Basic



Membrane control panel





OPTIONALS AND ACCESSORIES

OPTIONALS









Vacuum wand

Spray gun

FFF-FIMAP FAST FILL

FFM-FIMAP FLEET MANAGEMENT









Front driving LED headlights

FSS-FIMAP SOLUTION SAVER

Battery charger on board

Squeegee holder accessory








FLR-FIMAP LONG RANGE


Supersoft Wheels

E-Spray holder hooks

ACCESSORIES







A wide choice of disc or cylindrical brushes in PPL is offered, available in thicknesses from 0.3 to 0.9 cm. These offer the perfect solution for dealing with any type of dirt on any floor.

Abrasive brushes: Ideal for heavy duty cleaning on industrial surfaces.

Pads

BLACK - Superior abrasiveness for rapid and thorough heavy duty cleaning. GREEN - Ideal for removing dirt from more delicate floors (rubber or linoleum). RED - Ideal for scrubbing delicate or treated

Rear squeegee rubber blades 33 SHORE (PARA) For maintenance cleaning of smooth 40 SHORE (PARA) For stubborn dirt on floors with joints.

For heavy duty cleaning on industrial floors, even with wide gaps.

OPTIONAL AND STANDARD EQUIPMENT


| | _ | SINGL | E DISC | _ | _ | DUAL | DISC | | CYLINDRICAL | | | ORBITAL | | |
|--|------|---------|--------------|---------------|------|-------|--------------|---------------|-------------|---------------|----------------|---------|---------------|----------------|
| USER EXPERIENCE | 50 E | 50 B/Bt | 50 Bt Pro | 50 Bt Plus | 60 E | 60 Bt | 60 Bt Pro | 60 Bt Plus | 50 Bts | 50 Bts Pro | 50 Bts Plus | 50 Bto | 50 Bto Pro | 50 Bto Plus |
| iD-Intelligent Drive: | - | - | - | • | - | _ | - | • | - | - | • | _ | - | • |
| - 5 inch high resolution colour touch screen | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| - Log-in with password | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| - Zone programs | - | - | • | • | - | - | • | • | - | • | • | - | • | • |
| - Cruise control | - | - | • | • | - | - | • | • | - | • | • | - | • | • |
| - Eco Mode | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| - Power Mode | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| - Video tutorials | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| Membrane control panel | - | - | • | - | - | - | • | - | - | • | - | - | • | - |
| COMFORT | | | | | | | | | | | | | | |
| Hour meter | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Cleaning solution level indicator | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Fresh water empty tank light | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| Battery charger | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Automatic brush coupling/uncoupling | - | -/• | • | • | - | - | - | - | - | - | - | - | - | - |
| Brush and squeegee actuator | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| Brush head actuator | - | - | • | - | - | - | • | - | - | • | - | - | • | - |
| Brush head manual lifting | • | • | - | - | • | • | - | - | • | - | - | • | - | - |
| Squeegee manual lifting | • | • | • | - | • | • | • | - | • | • | - | • | • | - |
| Vacuum wand with 3 stage motor* | - | - | 0 | 0 | - | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 |
| Spray gun* | - | - | 0 | 0 | - | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 |
| Accessory holder | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| E-Spray holder hooks | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FFF (Fimap Fast Fill) | - | - | 0 | 0 | - | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 |
| Noiseless suction | - | - | • | - | - | - | • | - | - | • | - | - | • | - |
| PRODUCTIVITY | | | | | | | | | | | | | | |
| Water flow selector | - | - | • | • | - | - | • | • | - | • | • | - | • | • |
| Triple pressure selector | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| Double pressure | • | • | • | - | • | • | • | - | • | • | - | • | • | - |
| FFM (Fimap Fleet Management) with SOS device | - | 0 | 0 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Frame, squeegee and squeegee support in aluminum | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Vacuum speed selector | - | - | - | • | - | - | - | • | - | - | • | - | - | • |
| SAFETY | | | | | | | | | | | | | | |
| Driving LED headlights (front) | _ | 0 | 0 | • | _ | 0 | 0 | • | 0 | 0 | • | 0 | 0 | • |
| Emergency Stop | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Supersoft wheels | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Electro parking brake | - | -/• | • | • | - | • | • | • | • | • | • | • | • | • |
| ENVIRONMENT | | | | | | | | | | | | | | |
| FSS (Fimap Solution Saver)** | _ | _ | 0 | 0 | _ | _ | 0 | 0 | _ | 0 | 0 | _ | 0 | 0 |
| FLR (Fimap Long Range)** | _ | _ | 0 | 0 | _ | _ | 0 | 0 | _ | 0 | 0 | _ | 0 | 0 |
| FNC (Fimap Noise Canceling) | • | • | - | - | • | • | - | - | • | - | - | • | - | |
| FES (Fimap Energy Saver) | • | • | • | • | • | • | • | • | • | • | • | • | • | |
| FWF (Fimap Water Flow) | _ | _ | _ | _ | • | • | • | • | _ | _ | _ | _ | _ | _ |
| | | | | | | | | | | | | | | |

^{*} In PRO versions the two devices cannot be installed together


| STANDARD | o UPON REQUEST | - NOT AVAILABLE |
|----------|----------------|-----------------|

^{**} The two devices cannot be installed together

DIMENSIONS AND TECHNICAL DATA







50 E/B/Bt/Bto: 712 mm 50 Bts/60 E/Bt: 785 mm

50 E/B/Bt: 1299 mm 50 Bto: 1240 mm 50 Bts: 1277 mm

60 E/Bt: 1268 mm

| | | SINGLE DISC | | | | DUAL | . DISC | | CYLINDRICAL | ORBITAL | | | |
|--|---------------|-----------------|---------|--------------------------------|----------------|-------|---------------------------------------|---------------|-----------------|---------|-----------------|--|--|
| TECHNICAL DATA – Maxima | | 50 E | 50 B/Bt | 50 Bt Pro 50 Bt Plus | 60 E | 60 Bt | 60 Bt Pro 60 Bt Plu | s 50 Bts | 50 Bts Pro Flus | 50 Bto | 50 Bto Pro Plus | | |
| Productivity theoretical | up to sqm/h | /1887 1887 | | - 2239 | | | T | 1776 | T | 1887 | | | |
| Estimated coverage | up to sqm/h | | | | | 1513 | | | 1200 | 1275 | | | |
| SCRUBBING SYSTEM | | _ | | | | | | _ | | | | | |
| Working width | mm | | 5 | 10 | | 6 | 05 | | 480 | | 510 | | |
| Brush motors | (no.) V/W | (1) 230/375 | | | (2) 230/375 | | | | (2) 24/350 | | (1) 24/680 | | |
| Brush rpm | rpm | | | 14 | 0 | | | | 600 | | - | | |
| Oscillations | rpm | | | | - | | | | | 2000 | | | |
| Brush pressure (min - max) | kg | 21 | 21÷36 | 21÷45 | 27 | 26÷36 | 26÷45 | 25÷28 | 25÷35 | 28÷36 | 28÷45 | | |
| TANK AND RECOVERY SYSTEM Solution tank | | | | | | | 53 | | | | | | |
| Recovery tank | <u> </u> | | | | 55 | | | | | | | | |
| Suction motor | V/W | 230/450 | | 24/422 | 230/450 | | | | 24/422 | | | | |
| Vacuum water lift | mbar | 123 | | 121 | 123 | | | | 121 | | | | |
| 3-stage vacuum motor (for vacuum wand) | V/W | | - | 24/680 | | - | 24/680 | - | 24/680 | - | 24/680 | | |
| Vacuum water lift (3-stage motor) | mbar | | - | 181 | | - | 181 | - | 181 | - | 181 | | |
| Detergent tank capacity (FSS) | I | | - | 3 | | - | 3 | - | 3 | - | 3 | | |
| Maximum volume of the debris hopper | I | - | | | - | | | | 3,6 | - | | | |
| BATTERY SYSTEM | | | | | | | | | | | | | |
| Supply/traction | V/Hz | 230/50 | | | | | | | | | | | |
| Batteries | (no.) V/Ah C5 | - | | 2) 12/105 GEL 2) 12/110 WET | - | | (2) 12/105 GEL (2) 12/110 WET | | | | | | |
| Battery run time* | up to h | - | 4,6/3,9 | 3,2 | - | 3,4 | 3,2 | 2,8 | 2,2 | 3 | 3,2 | | |
| PROPELLING SYSTEM | | | | | | | | $\overline{}$ | | | | | |
| Forward working speed | km/h | | | | | | 3,5 | | | | | | |
| Transport speed | km/h | 3,5 3,5/4,9 4,9 | | | 3,5 | | · · · · · · · · · · · · · · · · · · · | 4,9 | 1,9 | | | | |
| Traction motor | V/W | - (1) 24/150 | | | - | | | (1) 24/150 | /150 | | | | |
| SPECIFICATIONS | | | | | | | | $\overline{}$ | | | | | |
| Machine dimensions (L x h x w) | mm | 1299 1097 | | | 1268 1097 | | | | 1277 1097 | | 1240 1097 | | |
| iviacinite uniterisions (E X II X W) | | 558 | | | 641 | | | | 567 | | 547 | | |
| Squeegee width | mm | | 712 | | 785 | | | | 712 | | | | |
| Machine weight empty without batteries | kg | 100 | 105/112 | 105 | 110 | 122 | 129 | 122 | 129 | 119 | 122 | | |
| Machine weight empty with batteries | kg | - | 183/190 | 183 | - | 200 | 207 | 200 | 207 | 197 | 200 | | |
| GVW (Gross Vehicle Weight) | kg | 154 | 239/246 | 247 | 164 | 256 | 271 | 260 | 275 | 253 | 264 | | |
| Sound level (ISO 11201) | dB (A) | | | | | | 66,8 | | | | | | |
| Sound level (ISO 11201) - Eco Mode | dB (A) | | | | | | 60,2 | | | | | | |

^{*} Run times are based on continuous scrubbing run times

We put our experience at your service, to help you realize the cleaning project perfect you. We suggest you the best solutions to make costs decrease and service quality

SETUP



We can help you set up your machines in order to make them meet specifically the requirements of the sites of your project, allowing you to always have control over costs and results

AUTHORIZED WORKSHOP NETWORK



Fimap Authorized Workshop network spans the globe, so you can enjoy the peace of mind of finding a professional support wherever your business is.

CONFIGURATION



Your business is unique, only a customized fleet can lead you to better results. We will help you find the configurations that best fit the specific requirements o your cleaning sites, in order to optimize processes and lower costs.

TRAINING COURSES



Fimap Academy offers courses for all levels, from the correct use of machines and technologies, up to the management of sites and tenders, helping you to make your service really competitive.

MAINTENANCE AND REPAIR



For your business to run smoothly it is essential that your machines are kept always operational. Our technicians take care of monitoring the machines health status and know how to intervene quickly and effectively when needed

FINANCIAL SOLUTIONS



You can choose to use the fleet in different ways. We can advise you on the best financial solution for your business so that you can get the quality of the Fimap world at the most convenient conditions for you.

DIGITAL FLEET MANAGEMENT SYSTEM



With Fimap Fleet Management everything is under your control. You can have a complete overview of the service provided and find out the improvements that can be made, basing your considerations on real data, always available via the MV Machine and or FFM website.

GENUINE SPARE PARTS



Get the most out of your machines, choose the reliability of Fimap original spare parts. They are designed together with the machines, so they perfectly fit them thus guaranteeing the highest quality of performance.

CERTIFICATIONS









For any additional information or for a demo please contact your usual Fimap dealer



FIMAP spa - Via Invalidi del Lavoro, 1 - 37059 S. Maria di Zevio - Verona - Italy Tel. +39 045 6060411 - Fax +39 045 6060417 - E-mail: fimap@fimap.com

